


engineering specifications

Model PR-9016

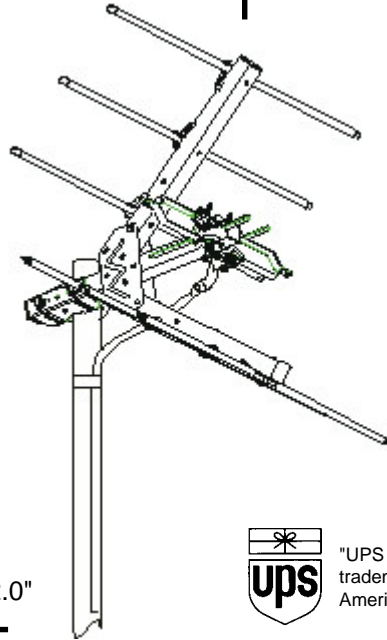

"UPS in shield design is a registered trademark of United Parcel Service of America, Inc. used by permission."

Active Elements 7
Boom Length 15.75"
Turning Radius 17.75"
Maximum Width 22"
Vertical Height 19" **Shpg. Weight** 3.0 lbs.
Element Diameter 3/8" **Carton Dimensions** 6.25"x4.25"x32.0"

Output Impedance: 300 ohm / 75 ohm with included transformer
Recommended Preamp: AP Series

Made in U.S.A.

GAIN	CH.14	CH.26	CH.38	CH.50	CH.62	CH.69
dB over reference dipole	5.8dB	6.5dB	7.5dB	8.0dB	8.0dB	7.7dB
beamwidth at half power points	59°	60°	54°	47°	39°	32°
front-to-back ratio	6dB	12dB	14dB	10.5dB	12.5dB	5.5dB

POLAR PATTERNS

